



PLATEAU is a stylish in-surface unit with a near flush profile, perfect for bringing power to training tables, soft seating and more!


Fitting neatly into surfaces .7" - 1.26" (18-32mm) PLATEAU sits proud by just .08" (2mm), integrating seamlessly into your furniture.

Available in white, black or silver and in two or three gang variants, with standard adjustable side or rear power cord exit. Customize PLATEAU for your specification with a combination of AC power, USB A+C type charging and data/AV options.


Multiple PLATEAU units can be connected and disconnected without the need for tools, all powered by a single starter cord with integral over-current protection for added peace of mind.

UNIQUE SELLING POINTS:

- Low profile .08" (2mm) steel fascia
- 2 gang or 3 gang options
- Black or gray socket options
- Quick release cable connections available
- International socket and Data/AV options
- Available with 25W or 60W TUF A+C USB charging

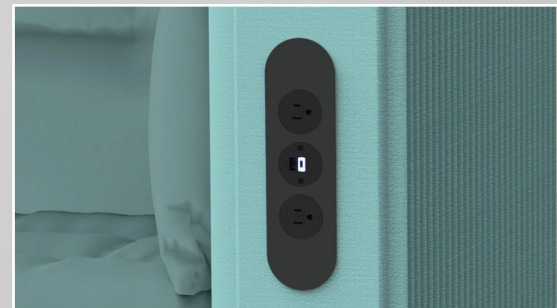


Available Modular Components:

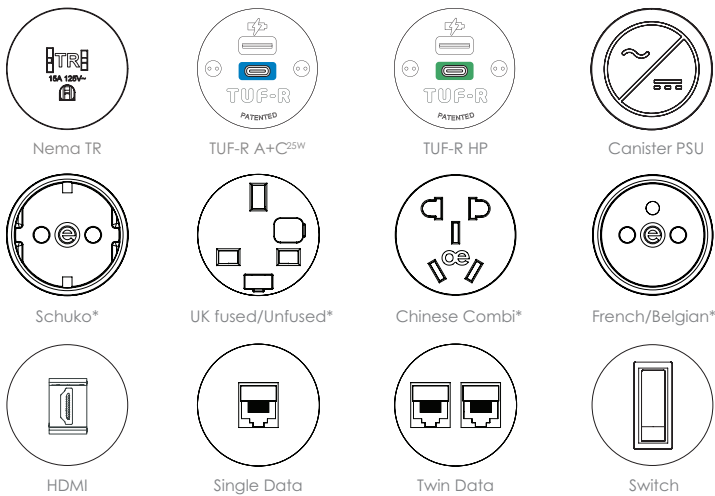


*for vertical applications only

See www.oeelectrics.com for full list of available [modular components](#).

Dimensions:

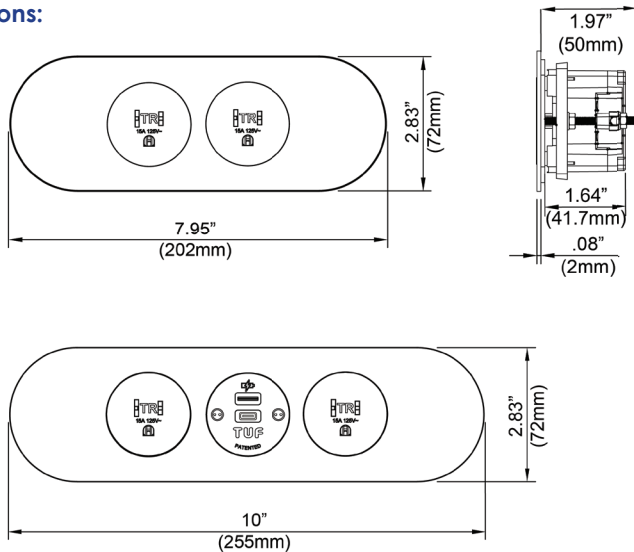

Cut out size:

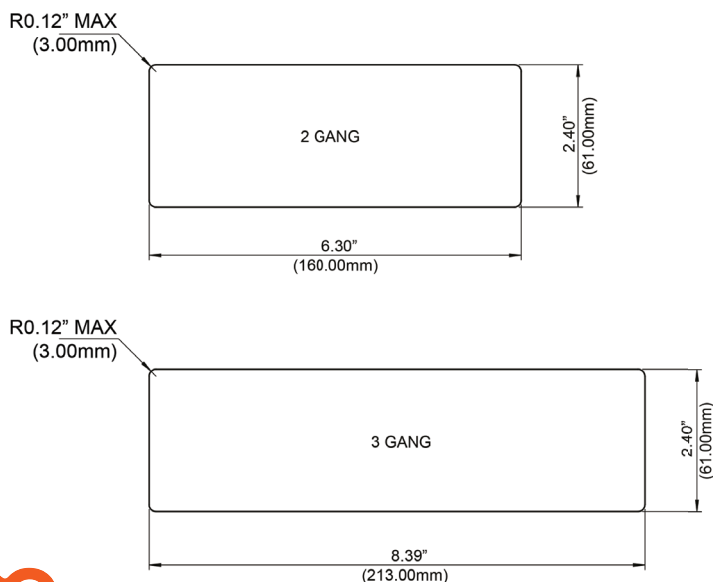

Configuration:

Populate PLATEAU's apertures with a combination of:
 - 53mm power sockets
 - TUF-R A+C 25W / TUF-R HP (60W) USB chargers
 - Data/AV, or Control devices

Internal segregation between Power and Data/AV in combined PLATEAU

Colors:

PLATEAU is available with black, white or silver frame and black or gray sockets.

Construction:

PLATEAU body - Fire retardant polycarbonate
 Socket fascia - Fire retardant polycarbonate
 Socket frame - 14 gauge (2mm) steel

Insulation:

Re-inforced insulation

Power and cord:

PLATEAU is wired as standard with a 32" 14/3 SJT cord to a male GST connector to be used with OE's pluggable GST system. A starter cord is required for GST option: 72", 108", or 180" 14/3 SJT cord with female GST connector, NEMA plug, and integral OCP standard.

Available by special order wired to a Nema 5-15 cord-n-plug, and in specialty configurations. Also available wired with a GST18i3 female-Y to GST18i3 male connector for 48", 60", and 72" Training Tables.

Rotating cable grip means the cable can exit via the rear or the side of PLATEAU without the need for tools.

Mounting:

- Easily mounts to .7" - 1.26" (18-32mm)
- Can be rear mounted with only circular fascia visible
- Suitable for horizontal and vertical applications*

* when specified with NEMA TR and/or TUF-R USB sockets

Quality and Testing:

- All PLATEAU units are manufactured using ISO9001 quality controlled components and practices and are 100% tested before dispatch.
- Visual: Configuration and appearance.
- Power sockets: Continuity, polarity, insulation & earth
- USB charger: Output voltage and resistance
- Data & AV: All sockets continuity tested with batch performance testing.

"we test every pin in every socket in every module"

Certifications:

cETLus - UL962A / CSA22.2

International certifications available upon request

