



“Floating” just above the surface, PEAK’s eye-catching design is an elegant new approach to power and data connectivity in meeting tables.

Choose PEAK in classic brushed stainless steel with black sockets or in matte white with gray socket fascias for a refined contemporary look.


PEAK offers two models (6 & 8 sockets) allowing you to select your optimum size. PEAK provides a wide range of international AC sockets, patented TUF-R A+C 25W USB charger, and data/AV options enabling a truly custom solution.

With a minimal (1.87” (47.6mm)) below surface profile, PEAK secures with the screw clamps supplied.




UNIQUE SELLING POINTS:

- Sleek low profile design
- Two housings to choose from
- No open wells to catch debris
- Shallow mounting depth (1.87” (47.6mm))
- Choice of AC power sockets, TUF-R A+C 25W USB charging, or data/AV
- Easy to clean and maintain





Available Modular Components:

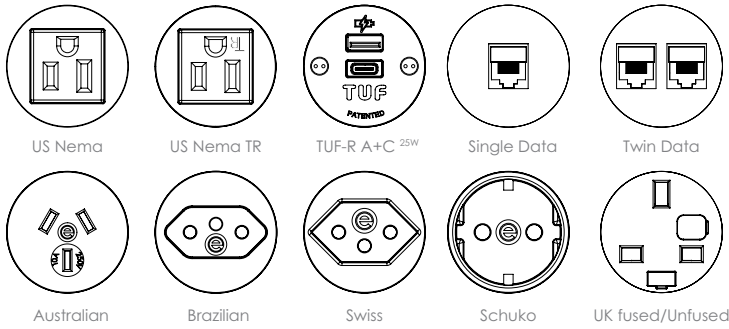


See www.oelectrics.com for full list of available [modular components](#).



PEAK 60 Dimensions:

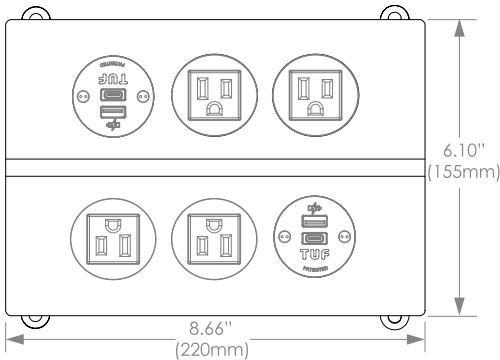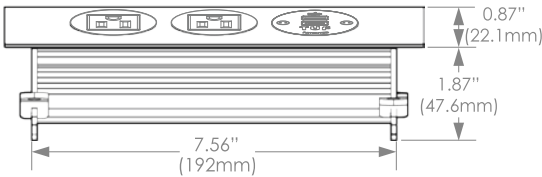

PEAK 80 Dimensions

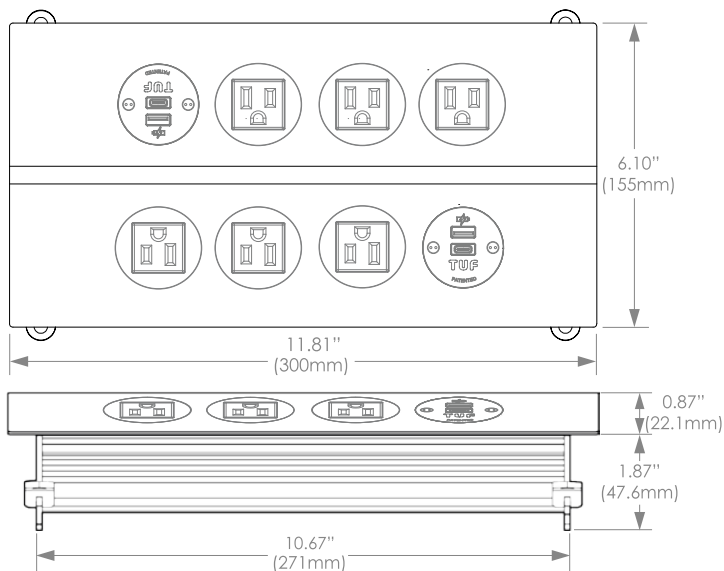

Cutout Dimensions

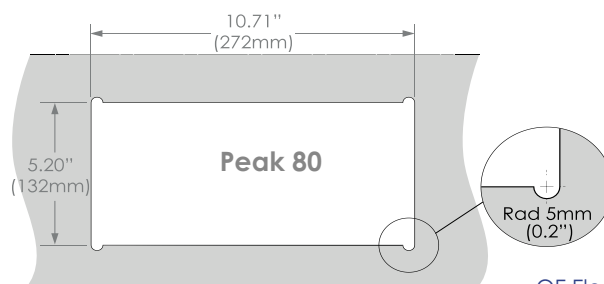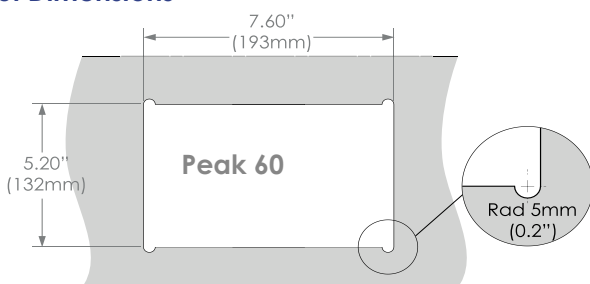

Configuration:

Populate PEAK's apertures with:
 - 42mm power sockets, or
 - TUF-R A+C 25W USB charger, or
 - Data/AV

Construction:

Socket frame: Brushed stainless steel or powder coated steel
 Body: Aluminum extrusion
 Endplate: Powder coated steel

Colors:

Standard - Matte white (9003) top plate, & gray socket fascias, or brushed stainless-steel top plate, & black socket fascias. (NEMA TR sockets - black only)

Installation:

PEAK 60 - Cutout 7.60" x 5.20" (193 x 132mm)
 PEAK 80 - Cutout 10.71" x 5.20" (272mm x 132mm)
 Secured with 4 x screw clamps, as standard, for surfaces 0.40"-1.18" (10-30mm)
 OPTIONAL: PEAK has a deep mount fixing option to accommodate thick surfaces 1.1"-1.77" (28-45mm), please enquire

Power and Cord:

PEAK is wired as standard with a 32" 14/3 SJT cord to a male GST connector to be used with OE's [pluggable GST system](#). Available by special order wired with a NEMA 5-15 cord and plug.
 A starter cord is required for GST option: 72" or 108" 14/3 SJT cord with female GST connector, NEMA plug, and Integral OCP standard.

Quality and Testing:

All PEAK units are manufactured using ISO9001 quality controlled components and practices and are 100% inspected before shipment

- Visual: Configuration and appearance
- Power sockets: Continuity, polarity, insulation & grounding
- TUF-R A+C 25W USB charger: Fully function tested, as well as 4 hour "full-load" soak tested"
- Data & AV: 100% continuity tested; all orders are batch tested for performance compliance

"we test every pin in every socket in every module"

Certifications:

cETLus Listed - UL962A/CSA22.2
 International certifications available on request.