pelican



The perfect solution to powering underpowered spaces, PELICAN perches right where you need it. Its unique style is easy to identify.

Distinctive, stable, and loaded with advanced technology, PELICAN provides the best possible charging experience for wherever you choose to place it.

PELICAN is available in an expansive array of dynamic colors and finishes. Standard in two heights 24" (600mm) and 36" (900mm). PELICAN pairs perfectly with soft seating and desking, making it the obvious choice for common areas, libraries, cafés, and hotel foyers. Designed with versatility in mind, PELICAN is the ideal product when powering challenging spaces.






OE Electrics Inc. USA sales@oeelectrics.com; www.oeelectrics.com Tel: 1-(844) 927-0600 toll free

North America - United Kingdom - Germany - Dubai - Australia

OE Electrics Inc - Pelican Datasheet July 2020





Available Modular Components:

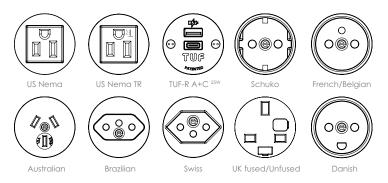

See www.oeelectrics.com for full list of available modular components.

Dimensions:

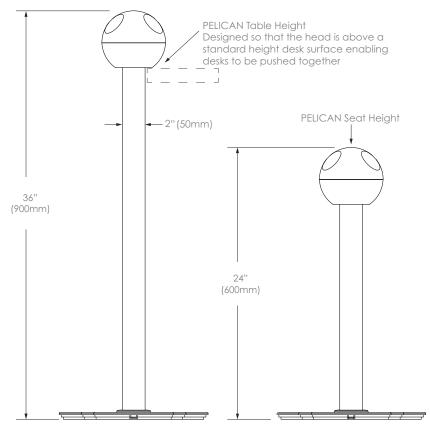

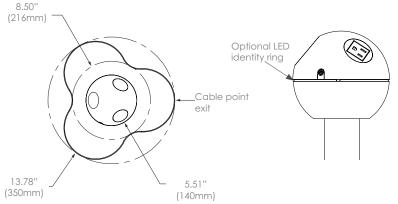

Configuration:

Populate PELICAN's apertures with:

- 42mm power sockets, or
- TUF A+C 25W USB charger
- Choose 24" (600mm) or 36" (900mm) heights
- *Pelican is not available with data/AV

Construction:

PELICAN comprises a high-strength and flame retardant PLUTO power module and underdome, bolted to a heavy duty aluminium extruded leg which is, in turn, bolted to a 0.59" thick powder coated steel base. The steel base includes silicon feet for use on hard floor surfaces.

Installation:

PELICAN is designed for on-site final assembly of PLUTO unit, underdome, leg and base. See <u>assembly instructions</u> <u>downloadable</u> from OE Web site for full details.

Colors:

- PELICAN Dome Polished white, satin white, satin black or any available PLUTO color option
- PELICAN Underdome Satin White as standard, or can be painted with a Satin Color
- Socket fascias Black or gray (NEMA TR sockets black only)
- Extruded leg Natural anodized standard, black or white as options
- Steel base Silver (RAL9006) powder coated as standard, matte white or black optional
- Power cord Black
- LED ring red, blue, green, and white optional
- Custom-8 specialty colors available



Power and Cord:

PELICAN is supplied with interchangeable 14/3 SJT starter leads to NEMA 5-15 straight plug. Please specify length required.

Quality and Testing:

All PELICAN units are manufactured using ISO9001 quality controlled components and practices and are 100% inspected before shipment.

- Visual: Configuration and appearance
- Power sockets: Continuity, polarity, insulation & grounding
- TUF-R A+C 25W USB charger: Fully function tested, as well as 4 hour "full-load" soak tested"

"we test every pin in every socket in every module"

Certifications:

cETLus Listed - UL962A/CSA22.2

International certifications available on request.

