

PHASE is ideal for providing convenient and discreet power, USB, and data in offices, common areas, hotels, airports and then some.

Compact, robust, and unconstrained by convention, you will find PHASE an innovative option for your furniture. With its concealed mounting bracket and rear or base cable exit, PHASE is an easy-to-install solution for desks, tables, and soft furnishings alike.


PHASE is available in white or black with your choice of gray or black socket fascias. The two socket apertures can be fitted with any combination of power, patented TUF-R A+C 25W USB charging, and data.

UNIQUE SELLING POINTS:

- Stylish, compact & robust design
- On or under surface mounting options
- Concealed mounting bracket
- Cord exit through base or back
- AC power sockets, TUF-R A+C 25W USB charger, data/AV options





Available Modular Components:

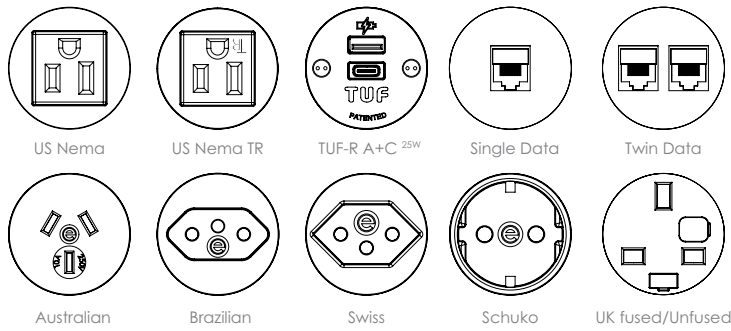

See www.oelectrics.com for full list of available [modular components](#).

Dimensions:

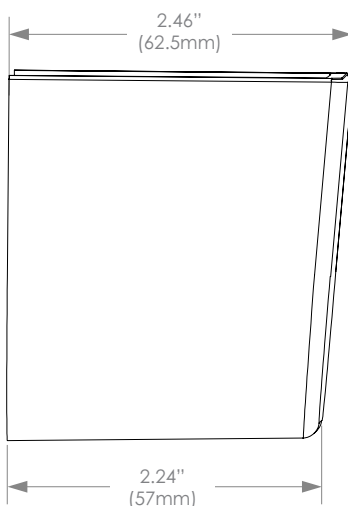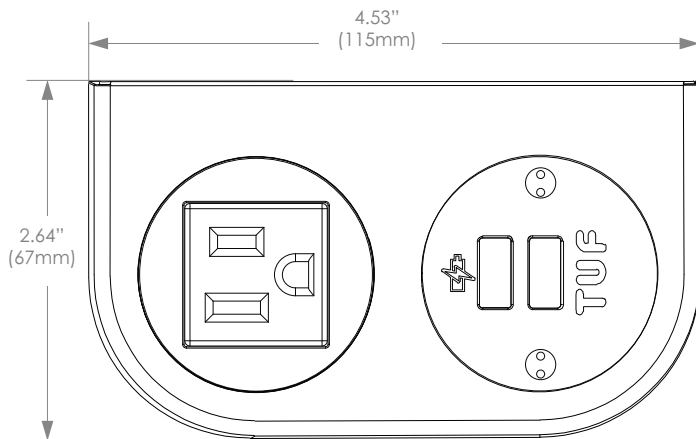

Configuration:

Populate PHASE's two apertures with any combination of:

- 42mm power sockets, or
- TUF-R A+C 25W USB charger, or
- Data/AV

Construction:

- PHASE body - polycarbonate
- Power socket, TUF fascia - polycarbonate
- Universal mount - nylon
- Custom mounts - metal

Color:

Body - black or white

Power, TUF, & data fascia - black or gray (NEMA TR sockets - black only)

Power cord - black

Power and Cord:

PHASE is wired as standard with a 32" 14/3 SJT cord to a male GST connector to be used with [OE's pluggable GST system](#).

Available by special order wired with a NEMA 5-15 cord and plug.

A starter cord is required for GST option: 72" or 108" 14/3 SJT cord with female GST connector, NEMA plug, and Integral OCP standard.

Data:

Data/AV with 1.8m / 3m cords can be integrated into PHASE on request. Alternatively, can be supplied with keystone data aperture for site installation of data.

Mounting:

PHASE is designed to allow brackets to be changed on-site. Unless stated otherwise, PHASE can simply be moved (using the same bracket) or attached to another feature on the desk simply by changing the bracket.

Quality and Testing:

All PHASE units are manufactured using ISO9001 quality controlled components and practices, and are 100% tested before shipment

- Visual: Configuration and appearance
- Power sockets: Continuity, polarity, insulation & ground
- TUF-R A+C 25W USB charger: Fully function tested, as well as 4 hour "full-load" soak tested"
- Data & AV: 100% continuity tested; all orders are batch tested for performance compliance

"we test every pin in every socket in every module"

Certifications:

cETLus - UL962A / CSA22.2

International certifications available upon request.