

1

Unit One      Unit Two

Left QF3 Blank Fixed      Right QF3 Blank Removable

Locking clip      Locking clip

Locking clips need to be removed

QF3 needs to be removed

**NOTE:** Schuko QikFit shown. All QF modules connect similarly.

2 Cut locking clip as shown below

Cut line for removing locking clip

3 Using pliers remove both parts of locking clips from modules


Grasp half the clip and rotate pliers toward the module, repeat for the other half

**Care should be taken not to damage the modules when removing the locking clips**


4

Locking clip removed from left hand module      Locking clip removed from both modules


5 Remove QF3 from right hand side of unit one using pliers

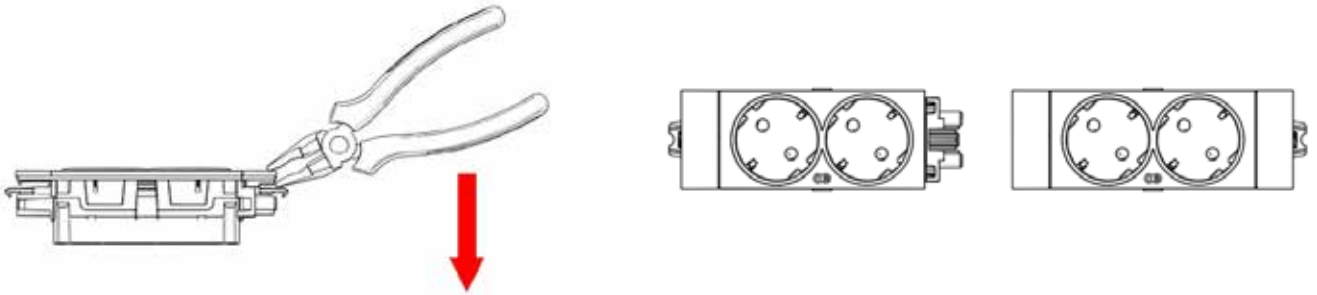

6 Clip units one and two together

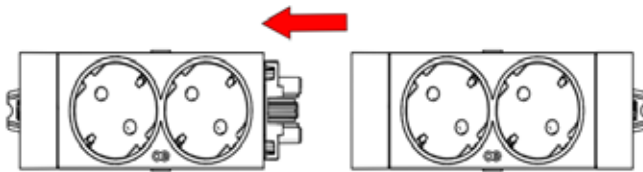

7

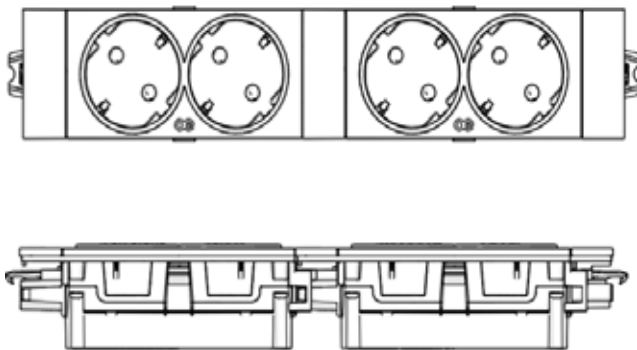

View the video here: [QikFit Power Modules](#) or search for connecting two QikFit Euro modules on YouTube